


**Brass**

**SHUT-OFF COCKS**

- Designed for automotive or industrial use AGA approved shut-off cocks approved for LPG and natural gas applications. Lubricant may wash out at higher pressures or with some exotic fluids.
- Designed for working pressure of 15 PSI.
- Forged brass bodies and brass handles.
- Instantaneous off-on operation with 360° rotation.

**FLARE X MALE PIPE**



V402F  
848

Part #	Size	
13-04-02	1/4X1/8	27SAE
13-04-04	1/4X1/4	227SAE
13-05-02	5/16X1/8	29SAE
13-05-04	5/16X1/4	229SAE
13-06-04	3/8X1/4	57SAE
13-06-08	3/8X1/2	577SAE
13-08-06	1/2X3/8	67SAE

**FLARE X FLARE**

Please request  
AGA values



842  
V203F  
136C

Part #	Size	
12-04-04	1/4	28SAE
12-05-05	5/16	30SAE
12-06-06	3/8	58SAE
12-08-08	1/2	68SAE
12-10-10	5/8	1010SAE

**FEMALE X FEMALE PIPE**




138C  
2046

Part #	Size	
46-127	3/8X3/8	163SAE
46-125	3/8X1/2	161SAE
46-126	3/8X1/2	161SAE
46-128	1/2X1/2	164SAE
46-123	5/8X1/2	164SAE

**COMP X MALE PIPE**

See page 45  
to order  
NUT and SLEEVE  
separately.



868  
V304C  
2068  
133C  
VC206

Part #	Size	
11-04-02	1/4x1/8	27-C
11-04-04	1/4x1/4	227-C
11-05-02	5/16x1/8	29-C
11-06-04	3/8x1/4	57-C
11-06-06	3/8x3/8	557-C

**COMP X COMP**

See Page 45  
to order  
NUT and SLEEVE  
separately.



V3030F  
2062  
134C

Part #	Size	
10-04-04	1/4	28-C
10-05-05	5/16	30-C
10-06-06	3/8	58-C
10-08-08	1/2	68-C

**FEMALE X FEMALE PIPE**



V403P  
132C  
875

Part #	Size	
17-02-02	1/8	
17-04-04	1/4	
17-06-06	3/8	
17-08-08	1/2	




**MALE X FEMALE PIPE**



880  
V402P  
130C

Part #	Size	
15-02-02	1/8	48-P
15-04-04	1/4	49-P
15-06-06	3/8	50-P

**MALE PIPE X MALE PIPE**




1V401P  
890

Part #	Size	
14-02-02	1/8	76-P
14-04-04	1/4	77-P
46-166T*	1/4	
14-06-06	3/8	78-P

\*125 PSI

**COMPRESSION X MALE PIPE  
LEFT TO RIGHT ANGLE**

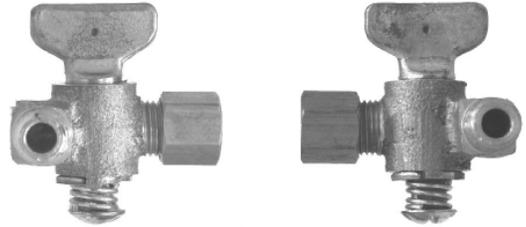

Part #	Size	
46-168	LEFT 1/4X1/8	79C
46-169	RIGHT 1/4X1/8	89C

**Brass**

