

Garden Hose Accessories



Garden Hose Gooseneck

Part # GHGN

- Powder-coated zinc gooseneck connector angles hose away from hose bib
- **125 PSI**



Straight GHT Valve

Part # GHV

- Powder-coated zinc shut-off valve
- Hot water up to **160°F**
- **150 PSI**



Straight GHT Valve with Handle

Part # GHVEZK

- Powder-coated zinc shut-off valve with easy on/off handle
- Hot water up to **160°F**
- **150 PSI**



GHT Twin Valve

Part # GHYV


- Powder-coated zinc with twin shut-off valves
- Hot water up to **160°F**
- **150 PSI**



GHT "Y"

Part # GHY

- Plated zinc with twin outlet
- Hot water up to **160°F**
- Includes one end cap
- **150 PSI**

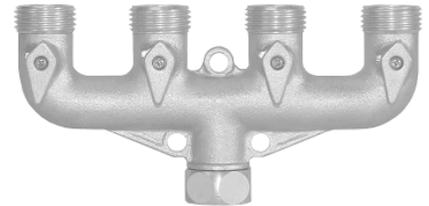

GHT 4-Valve Manifold

Part # 500-GH4V

- Stainless balls
- Teflon® seats
- Swivel inlet

Pressure Spray Gun

- 3/8" female inlet
- 1/4" female outlet
- **8 GPM**
- Operating pressure: **4500 PSI**
- Temperatures to **300°F**
- Anti-fatigue pressure compensating design



Part # HPSG

Braided Rubber Hose



Part #	Pressure	Length	Inside Diameter	Male Inlet	Male Swivel Outlet
AR503830SSP	3,000 PSI	50'	3/8"	3/8"	3/8"

Brass Industrial Grade Front Lever Spray Nozzle

The brass industrial grade spray nozzle provides effortless one hand operation: by actuating the operating lever the valve is opened/closed and the jet power is regulated from spray to concentrated jet.

- Durable nozzle constructed of a high quality brass and steel combination.
- Maximum operating pressure: **350 PSI**
- Suitable for hot water up to **122°F**
- The adjusting screw on the back of the gun allows you to fix the desired form of jet. The fixing clamp for the operating lever allows permanent service.
- **6.6 GPM** flow capacity at **72 PSI**
- 1/2" female NPT inlet



Part #	Body
DWG050	Brass

Garden Hoses Coiled Garden Hose

- Automatically recoils to a fraction of its working length when not in use
- Resists kinking and marring
- Extremely durable in both hot and cold environments
- Constructed of polyurethane
- Working pressure **100 PSI**

Part #	Size	Color
CGH38	3/8" x 25'	Red
CGH50	1/2" x 25'	Blue



Rubber Vinyl Garden Hose

- Extra tough, five-ply construction
- Exclusive, soft textured, abrasion-resistant cover
- Dual reinforced, heavy-duty, flexibility, kink resistance
- Combines durability of rubber, easy handling of vinyl
- SEAL-TITE® leakproof coupling
- Green cover
- Working pressure **150 PSI**

Part #	Size
SGH25	5/8" x 25'
SGH50	5/8" x 50'
SGH75	5/8" x 75'
SGH100	5/8" x 100'
SGH50-75	3/4" x 50'
SGH75-75	3/4" x 75'

Temperature Range: **0°F to 140°F**



Contractors Rubber Water Hose

- EPDM tube
- Spiral synthetic cord reinforcement
- Black EPDM cover
- Heavy duty, crush proof solid brass couplings with wrench grips
- Working pressure **150 PSI**

Part #	Size
CWH50	3/4" x 50'

Temperature Range: **-20°F to 180°F**



**Hose
Accessories**





Layflat Garden Hose

Part #	Size
LFGH50	5/8" x 50'

- USFDA-approved tube materials for food contact use
- Coils flat for compact, easy storage
- For pools, patios, cabins, campers, boats
- Drains automatically
- Non-marring nylon couplings
- Working pressure **300 PSI**



Premium Rubber Hose

Part #	Size
PGH50	5/8" x 50'
PGH75	5/8" x 75'

Temperature Range: -20°F to 160°F

- Professional grade reinforcement provides maximum strength
- Heavy-duty flexibility
- Ultimate kink resistance
- SEAL-TITE® leakproof coupling
- Black cover
- Working pressure **150 PSI**



Hot Water Rubber Reinforced Hose

Part #	Size
HWH50	5/8" x 50'
HWH50-75	3/4" x 50'

- Withstands extensive hot water (**200°F**) use.
- Maximum wear, abrasion-resistant cover
- Industrial style reinforcing for flexibility, high burst strength
- Extra heavy-duty, crush-proof, machined brass couplings
- Red cover
- Working pressure **130 PSI**



Marine, Camper, Patio & Pool Hose

Part #	Size
MCH50	5/8" x 50'

- Lightweight to handle, easy to store
- USFDA-approved tube materials for food contact use
- Non-marring nylon couplings
- White cover
- Working pressure **80 PSI**



Country Club® RT Hose

Part #	Size
CCH50	1" x 50'

- For golf courses, parks, nurseries
- Premium PVC for high strength, flexibility
- Lightweight, easy handling
- Industrial knit reinforcing for kink resistance
- **450 PSI** burst
- Heavy duty 1" NPSH brass couplings
- Green cover
- Working pressure **150 PSI**