


FULL PORT 600WOG FORGED BRASS BALL VALVE

**ISO 9002 Manufacturer
FEATURES**

Gas Approved



- Suitable for full range of liquids and gasses.
- Minimal pressure drop due to large full size ports.
- Bottom loaded, pressure retaining stem.
- Pressure rated at 600 PSI (42 bars) WOG (non-shock) and 150 PSI (10.34 bars) saturated steam. Virgin TFE stem packing seal, thrust washer and seats.
- Vinyl insulator on heavy duty plated carbon steel handles.
- Fast 1/4 turn open or close operation.

- Low operating torque.
- Adjustable stem packing gland.
- Maximum operating temperature: 248°F (120°F)
- Minimum operating temperature: -20°F (-40°C)
- KV: Pressure drop m^3/h .
- Each valve individually tested.
- Forged Brass - for more strength.
- Threaded ends to ANSI B1.20.1
- Hard chromium plated solid ball.
- Bottom entry, blow-out proof stem.
- Deeper threads - for better connections.




MIP X FIP



MIP X MIP

Part #	Size
04BVMF	1/4
06BVMF	3/8
08BVMF	1/2
12BVMF	3/4
16BVMF	1
20BVMF	1-1/4
24BVMF	1-1/2
32BVMF	2

Part #	Size
04BVMM	1/4
06BVMM	3/8
08BVMM	1/2
12BVMM	3/4
16BVMM	1
20BVMM	1-1/4
24BVMM	1-1/2
32BVMM	2

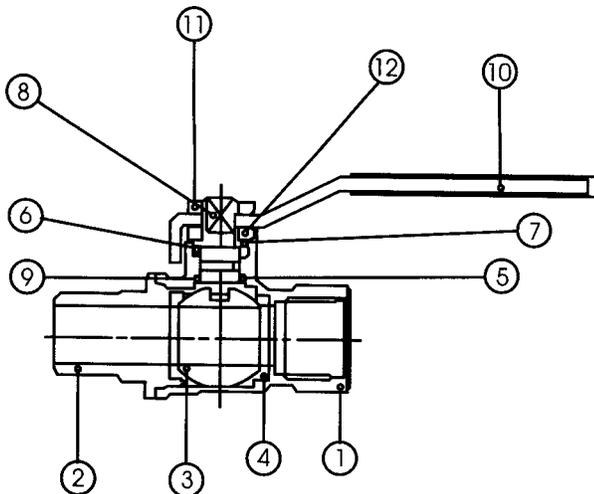

POS	Components	Materials
1	Body	CW617N Forged Brass
2	End Connection	CW617N Forged Brass
3	Ball	CW617N CP Brass
4	Ball Stems	P.T.F.E.
5	Stem. Antif. Seat	P.T.F.E.
6	Stem Seat	P.T.F.E.
7	Brass Ring	CW617N Brass
8	Stem	CW617N Brass
9	O-Ring	MBR 80
10	Handle	UNI EN 10025 Steel
11	Nut	UN 5771 Steel
12	Nut	CW617N Brass

Valves