

FORGED BRASS MINI-BALL VALVES

- 200 WOG
- 125SWP

180° operational handle, blow out proof stem.
Stem with double "O" Rings.



FEMALE X FEMALE

Part #	Size
944-114	1/8x1/8
944-115	1/8x1/4
944-116	1/4x1/4
944-117	3/8x3/8
944-118	1/4x1/2
944-140	1/2x1/2



MALE X FEMALE

Part #	Size
944-114	1/8x1/8
944-106	1/8x1/8
944-100	1/8x1/4
944-101	1/4x1/4
944-102	3/8x3/8
944-103	1/4x1/2
944-104	1/2x1/2



MALE X MALE

Part#	Size
944-108	1/8x1/4
944-109	1/4x1/4
944-110	3/8x3/8
944-111	1/4x1/2
944-112	1/2x1/2



MALE X HOSE BARB

Part#	Size
944-137	1/8x1/8
944-126	1/8x3/8
944-138	1/4x1/4
944-128	1/4x3/8
944-132	1/2x3/8
944-139	1/2x1/2



HOSE BARB X HOSE BARB

Part#	Size
944-142	1/4x1/4
944-133	5/16x5/16
944-134	3/8x3/8



FEMALE X HOSE BARB

Part#	Size
944-135	1/8x1/8
944-120	1/8x3/8
944-136	1/4x1/4
944-122	1/4x3/8
944-123	3/8x3/8



NO	Part Name	Materials
1	Nut	Steel
2	Handle	Steel
3	Cover	PVC
4	O-Ring	NBR
5	Stem	Brass
6	Body	Brass
7	Seat	Teflon
8	Ball Disc	Brass
9	End Plug	Brass

**FULL PORT 600WOG FORGED BRASS BALL VALVE
ISO 9002 Manufacturer**

Made in Italy


FEATURES

- Longer body style for longer, deeper thread connections.
- One piece drawn sand blasted body.
- Finest brass according to UNI 5705-65 spec.
- Each valve seal is tested for maximum safety.
- NPT taper ANSI B1.20.1 threads.
- Double seal system allows valve to be operated in both directions making installation easier.
- -4°F to +200°F temperature.
- 1/4 turn handle with mechanical stop.




FEMALE X FEMALE

Part #	Size		Dimension					
	G	DN	A	B	C	E	CH	KV
2930-02	1/8"	0.24	1.51	1.2	0.9	0.31	0.83	0.9
2930-04	1/4"	0.31	1.88	1.2	0.9	0.51	0.83	0.9
2930-06	3/8"	0.31	1.88	1.2	0.9	0.51	0.83	0.9
2930-08	1/2"	0.39	2.18	1.28	0.9	0.61	0.96	2.3




Made in Italy



MALE X FEMALE

Part #	Size		Dimension					
	G	DN	A	B	C	E	CH	KV
2931-02	1/8"	0.24	1.5	1.2	0.9	0.34	0.83	0.9
2931-04	1/4"	0.31	1.77	1.2	0.9	0.48	0.83	0.9
2931-06	3/8"	0.31	1.81	1.2	0.9	0.49	0.83	0.9
2931-08	1/2"	0.39	2.15	1.28	0.9	0.65	0.96	2.3

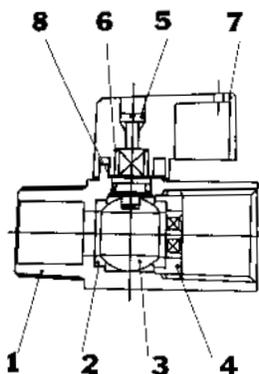

POS	Components	Materials
1	Body	CW517N Forged Brass
2	End Connection	P.T.F.E.
3	Ball	CW517N CP Brass
4	Ball Stems	CW614N Brass
5	Stem. Antif. Seat	CW614N Brass
6	Stem Seat	UNI 5771 Steel
7	Brass Ring	Nylon
8	Stem	NBR 80

