

WHITE PVC BALL VALVES

- Quarter turn
- Solvent ends comply with ASTM D2466
- Designed for use in residential, commercial & industrial system as well waste water, chemical, agricultural applications, marine, food processing, swimming pools
- Corrosion resistant
- EPDM seal
- EPDM O-ring
- Fits both Sch. 40 & 80 pipe
- NSF approved
- Rated for 150 PSI at 730
- Threaded ends comply with ANSI B1.20.1

**MOULDED IN PLACE
WHITE PIPE THREADS**



Part #	Size	Box	Case
940-284	1/2"	10	100
940-285	3/4"	5	60
940-286	1"	5	40
940-287	1-1/4"	5	30
940-288	1-1/2"	4	24
940-289	2"	4	16
940-290	2-1/2"	3	12
940-291	3"	3	12
940-292	4"	2	8

**WHITE SOCKET
SLIP X SLIP**



Part #	Size	Box	Case
940-294	1/2"	10	100
940-295	3/4"	5	60
940-296	1"	5	40
940-297	1-1/4"	5	30
940-298	1-1/2"	4	24
940-299	2"	4	16

Grey also available in some sizes.
Just change prefix to 941 instead of 940.


**HOSE BIBBS
3/4" HOSE THREAD OUTLET**




MOULDED IN PLACE

Part #	Male Pipe Size	Box	Case
942-170	1/2 (1/2")	12	72
942-171	3/4	12	72

**FULL PORT
AUTOMATIC DRAIN & LATCH LOCK HANDLE**

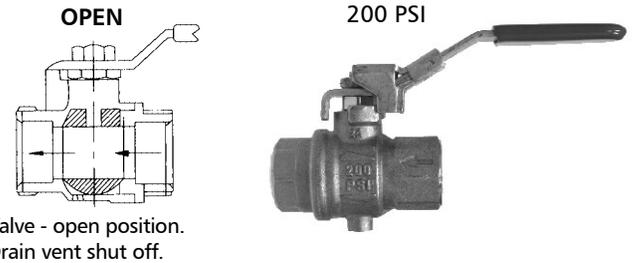

Valve - open position.
Drain vent shut off.



Valve - closed and drained occurs. Upstream seat prevents air flow.
Downstream system is vented to atmosphere.

Part #	Size	Box	Case
948-131	1/4"		
948-132	3/8"		
948-133	1/2"	10	120
948-134	3/4"	10	90
948-135	1"	4	60

Do more than exist - live.
Do more than touch - feel.
Do more than look - observe.
Do more than read - absorb.
Do more than hear - listen.
Do more than listen - understand.

- John H. Rhoades

