


Y-Strainer

CLASS 150 BRONZE Y-PATTERN STRAINER

- Protects regulators, pumps, meters and other controls from damage due to sediment scale, metal chips or other foreign materials.
- Threaded ends.
- 300 PSI WOG non-shock.
- 150 PSI SATURATED STEAM.
- Screwed cap is threaded & gasketed.
- Tapped drain plug opening in cap.
- 304 stainless steel screen #20 mesh.
- Self-cleaning.
- Self-cleaning can be accomplished by opening the valve or plug connected to the blow-off outlet.
- Hydrostatic test pressures shell 450 PSI.

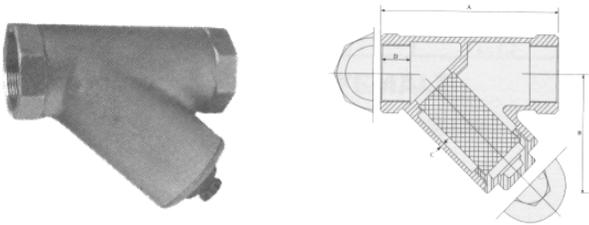


Part #	Size	A	B	C	D	Plug Size
105-501	1/4	2.60	1.89	.09	.41	1/4
105-502	3/8	2.60	1.89	.09	.41	1/4
105-503	1/2	3.13	2.28	.10	.39	1/4
105-504	3/4	3.43	2.36	.11	.55	1/4
105-505	1	4.09	2.83	.12	.63	3/8
105-506	1-1/4	4.90	3.23	.14	.79	3/8
105-507	1-1/2	5.59	3.74	.15	.80	1/2
105-508	2	6.69	4.72	.2	1.10	1/2
105-509	2-1/2	8.39	5.83	.21	.93	3/4
105-510	3	9.06	6.69	.22	1.12	3/4

Materials	
Body	Bronze
Cap	Bronze
Screen	Type 304 S.S. #20 Mesh
Gasket	Non-Abrasive
Plug	Brass

**REPLACEMENT SCREENS
304 S.S. #20 MESH**


CAST BRASS SWING CHECK VALVES

- Working pressure non-shock: 200 PSI W.O.G. (cold water, oil, gas) 125 PSI S.W.P. (saturated steam).
- Swing type disc.
- Screwed cap.
- Hard Seat.
- 90o Straight Pattern.
- Used to prevent reverse flow in commercial and industrial applications.
- Threaded ends to ANSI b1.20.1
- Integral seat.



CAST BRASS SWING CHECK VALVES IPS SCREWED ENDS

Part #	Size
105-101	1/4
105-103	1/2
105-104	3/4
105-105	1
105-106	1-1/4
105-107	1-1/2
105-108	2
105-109	2-1/2
105-110	3
105-111	4

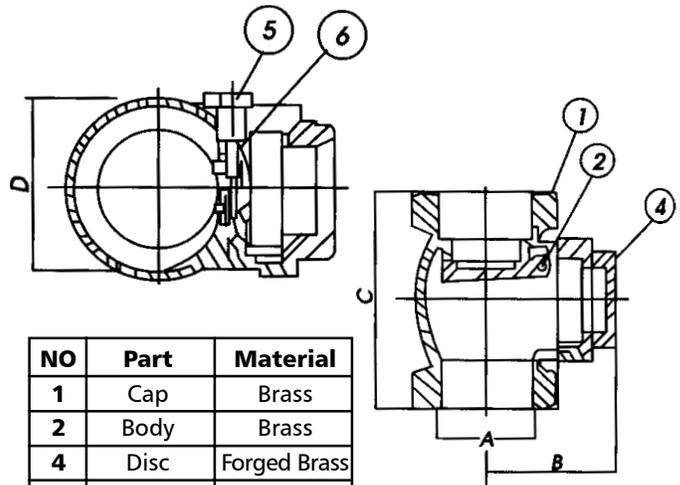

NO	Part	Material
1	Cap	Brass
2	Body	Brass
4	Disc	Forged Brass
5	Hinge Pin	Brass
6	Screw	Brass